

VIBRATIONS OF SHORT SPAN RAILWAY BRIDGES FOR HIGH SPEED LINES

P. Museros, M.L. Romero, A. Poy and E. Alarcón

Departamento de Mecánica Estructural y Construcciones Industriales,
Universidad Politécnica de Madrid, Madrid, Spain

Abstract

The physical model based on moving constant loads is widely used for the analysis of railway bridges. Nevertheless, this model is not well-suited for the study of short span bridges ($L \leq 15\text{--}20\text{ m}$), and the results it produces (displacements and accelerations) are much greater than those obtained experimentally. In this paper two factors are analysed which are believed to have an influence in the dynamic behaviour of short bridges. These two factors are not accounted for by the moving loads model and are the following: the distribution of the loads due to the presence of the sleepers and ballast layer, and the train-bridge interaction. Several numerical simulations have been performed in order to decide on their influence, and the results are presented and discussed herein.

1 Introduction

The dynamic behaviour of railway bridges has been a subject of research for many scientists and engineers since the first accidents occurred in metal bridges during the past century. Some of the most remarkable works on this subject are those by Stokes [15], Bresse [3], Willis [18], Bleich [2], Inglis [9], Timoshenko [17] and Frýba [7, 8], among others.

From these works it can be observed that the physical model most frequently used for the dynamic analysis of railway bridges is the so-called *moving loads model*. This model does not take into account the inertial effects of the train masses, and therefore the train is modelled as a series of concentrated, constant-valued loads travelling at speed V (see Figure 1). For this model closed-form solutions of the equations of motion can be obtained in a very simple manner [1, 7, 14, 17].

Nevertheless, if this model is used for the analysis of short span, simply supported bridges, the results (displacements and accelerations) do not match satisfactorily with those obtained from experiments carried out on real structures. Indeed, the lack of agreement between theoretical and experimental results is even more evident when the analysis of short bridges for high speed lines is pursued.

The temporary closure of the TGV line from Paris to Lyon is a good example of the problems that may arise in high speed lines. In that case, excessively high accelerations were detected in several bridges that lead to ballast liquefaction and, as a consequence, danger of derailment [10, 13].

In November 1995, the European Rail Research Institute (ERRI), located in the Netherlands, decided to create a committee of experts (ERRI D-214) in charge of the study of such problems. In one of the works by the ERRI D-214 committee [5] it can be observed that for the short spans the vertical accelerations of the deck predicted by the moving loads model reach very high values. This values are much greater than the limit acceleration related to the appearance of ballast liquefaction, which is about $7\text{ m/s}^2 \approx 0.7g$, i.e. 70% of the acceleration of gravity (see Figure 2).

However, though this theoretical result highlights the risk of appearance of excessive accelerations, the values predicted by the moving loads model are too high: Figure 2 shows accelerations of as much as 30 m/s^2 , and such high values have never been observed in real tests. This serious disagreement leads to the belief that the moving loads model does not take into account some particular features of the dynamic behaviour of short bridges.

In this paper the influence of two factors not accounted for by the moving loads model is analysed: the first one is the distribution of the loads through the sleepers and ballast layer; the second one is the train-bridge interaction. Other factors that are believed to play an important role in the dynamics of short bridges are the following:

- Values of damping during the passage of the train greater than the ones computed from the logarithmic decrement of the free oscillation. Values computed from the free oscillation are about 1% for reinforced and prestressed concrete structures.
- Boundary restrictions exerted by the rail in the transitions over the abutments.
- Vibration of the ballast layer.

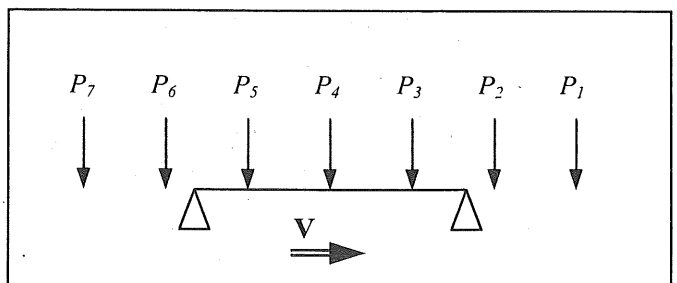


Figure 1: Moving loads model

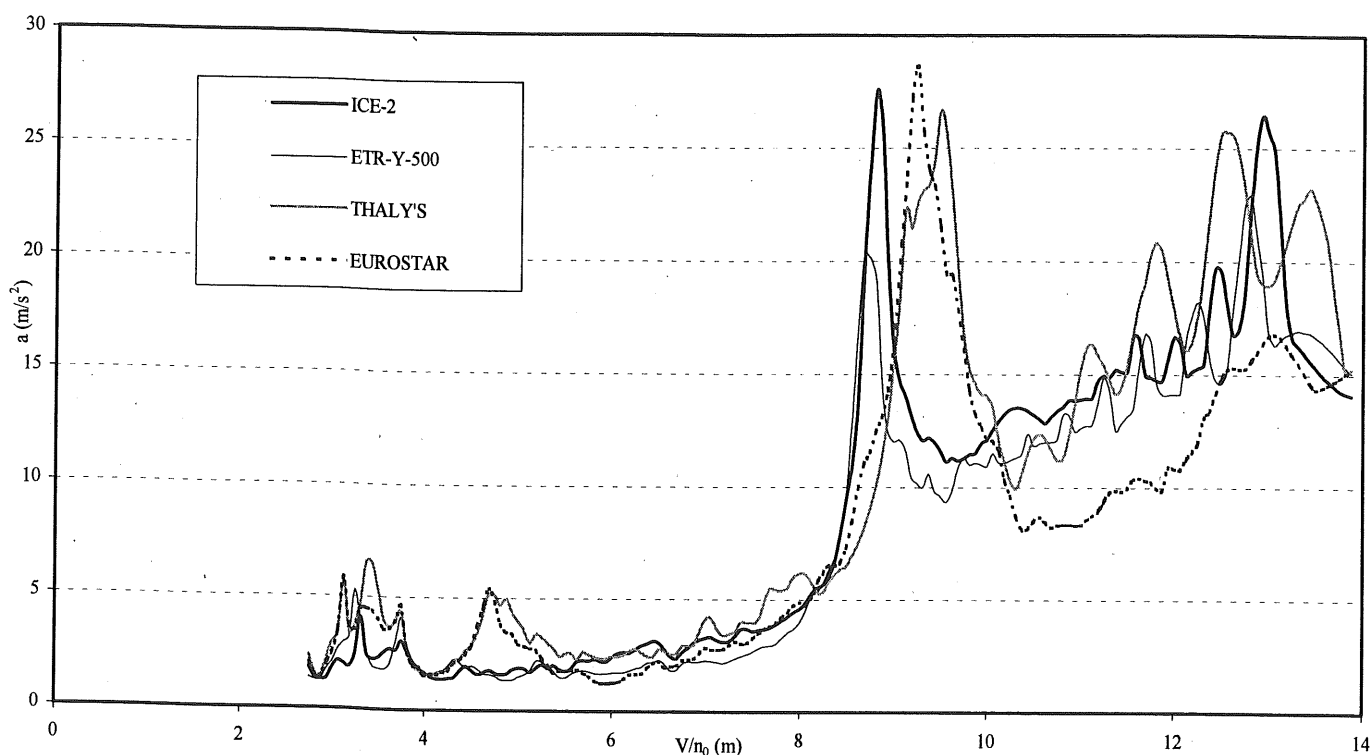


Figure 2: Maximum accelerations in a bridge of span $L=10\text{m}$. $n_0=8\text{Hz}$. Mass per unit length = 10000 kg/m

2 Numerical modelling

In order to compute the deflections and accelerations three computer programs have been developed. The mathematical bases of the different models can be reviewed in the works by several authors [1, 7, 14, 17]. The two first programs are based on the physical model of a simply supported beam crossed by a series of concentrated or distributed loads, respectively. According to this model, the dynamic behaviour of the bridge is governed by the well-known partial differential equation:

$$m \frac{\partial^2 y(x,t)}{\partial t^2} + EI \frac{\partial^4 y(x,t)}{\partial x^4} = q(x,t) \quad (1)$$

where $y(x,t)$ is the vertical deflection of the beam at point x and time t , m the constant mass of the beam per unit length, E the modulus of elasticity, I the constant moment of inertia of the cross section of the beam, and $q(x,t)$ the load acting per unit length at point x and time t . In both cases, for

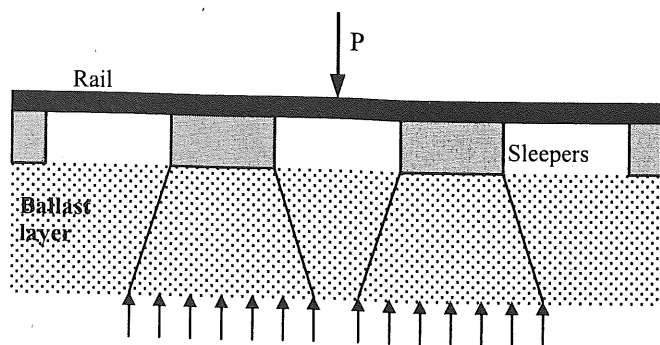


Figure 3: Distribution of the axle loads through the sleepers and ballast layer

concentrated (i.e., represented by means of Dirac Delta functions) as well as distributed loads, a closed-form solution for Equation (1) can be obtained and no numerical integration is required.

The third program, on the contrary, is able to analyse continuous girders crossed by a train of sprung and semi-sprung masses, and therefore can be used to treat the train-bridge interaction problem. This program uses two-dimensional beam elements in order to represent the behaviour of the bridge, and a set of concentrated masses, springs and dampers to account for the characteristics of the train.

The integration is carried out by means of a modified Newmark- β method [16]. The mass, damping and stiffness matrices of the whole system are updated at every time step, and the displacements of the axles, as well as the train-bridge interaction forces, are interpolated by means of the usual cubic hermitian polynomials. The time step for integration is chosen in such a way that it takes no less than 100 steps for any of the train axles to cross the span of the bridge. If this condition is satisfied the behaviour of the system can be considered linear within the step and no iterative procedures are required. Besides, the use of a longer time step proves inaccurate for the computation of the maximum displacements and accelerations. In order to ensure the desired accuracy, two additional restrictions are considered in the selection of the time step: it has to be shorter than 0,05 times the period of the third mode of the bridge, and also shorter than 0,05 times the period of the higher mode of the train. The results obtained with the third program has been checked against those presented by the ERRI D-214 committee in the *Train-Bridge Interaction* report [6] and the ones available in reference [19].

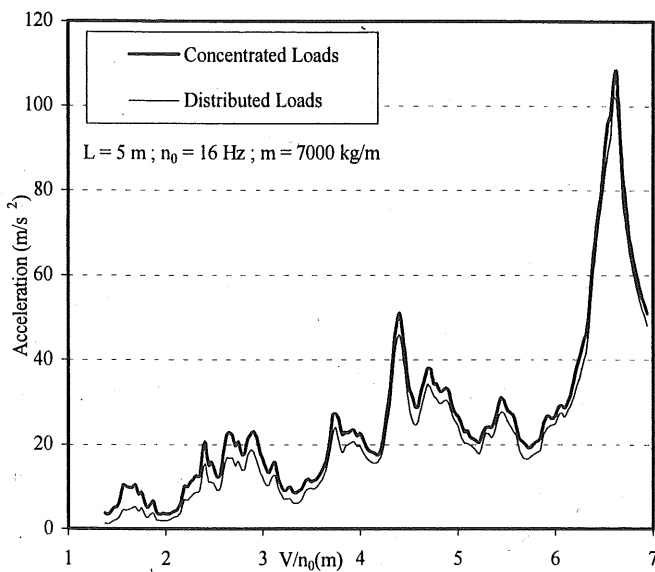


Figure 4: Maximum accelerations in a bridge of span $L = 5$ m. Five European high-speed trains considered

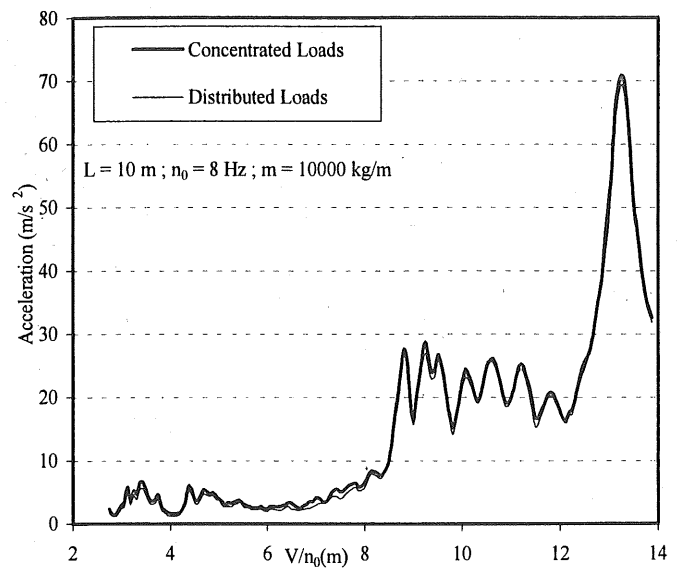


Figure 5: Maximum accelerations in a bridge of span $L = 10$ m. Five European high-speed trains considered

3 Distribution of the loads through the sleepers and ballast layer

In order to analyse the effects of the distribution of the loads beneath the sleepers and ballast layer (Figure 3), the similarity formulae proposed by ERRI [5, 12] are taken as a departure point. These formulae are valid for the concentrated and distributed loads models and are as follows:

$$\Phi = \frac{f\left(L, \zeta, m, n_0, \frac{V}{n_0}\right)}{f_{LM71}} = \frac{f'\left(L, \zeta, m', n_0', \frac{V'}{n_0'}\right)}{f'_{LM71}} \quad (2.a)$$

$$a_{max}\left(L, \zeta, m, n_0, \frac{V}{n_0}\right) = \frac{m'}{m} a'_{max}\left(L, \zeta, m', n_0', \frac{V'}{n_0'}\right) \quad (2.b)$$

In these formulae Φ is the *impact coefficient*, i.e., the relation between dynamic and static deflections at mid-span; f and f' are the maximum vertical deflections at mid-span of two bridges of the same length (henceforth called *first* and *second* bridges); f_{LM71} and f'_{LM71} are the static deflections at mid-span of the two bridges due to the Load Model 71; a_{max} and a'_{max} are the maximum vertical accelerations at mid-span; L is the length or span of the bridges and ζ is the damping ratio (a value of $\zeta=0.01$, i.e. 1% has been assumed). The variables that define the dynamic behaviour of the bridges are m and m' , which are the mass of the bridges per unit length, as well as n_0 and n_0' , which are the fundamental frequencies. Finally, V is the speed of the train passing over the first bridge (mass m , frequency n_0) and V' is the speed of the train passing over the second bridge (mass m' , frequency n_0').

The Load Model 71 is a static load pattern proposed by the Eurocode-1 [4] for the design of railway bridges. For computing the static deflection f_{LM71} a *classification factor* $\alpha=1.21$ has been used. This is permitted by the Eurocode-1 and is also imposed by the new Spanish Code of Actions in Railway Bridges [11].

It should be emphasised that the similarity formulae are valid provided that the wavelength λ has the same value for both bridges:

$$\lambda = \frac{V}{n_0} = \frac{V'}{n_0'} = \lambda' \quad (3)$$

As can be observed from equation (2.a), the value of the impact coefficient computed with the moving loads model is equal for *all* the bridges of the same length and damping ratio provided that the wavelengths are the same.

Now the reductions of the displacements (R) and accelerations (R') due to the load distribution through the sleepers and ballast are defined as follows:

$$R = \frac{\Phi_c - \Phi_d}{\Phi_c} \cdot 100 \quad (4.a)$$

$$R' = \frac{a_{max,c} - a_{max,d}}{a_{max,c}} \cdot 100 \quad (4.b)$$

In Equations 4, subscripts “c” and “d” stand for “concentrated loads” and “distributed loads” respectively. The analysis with the distributed loads model has been performed assuming that each of the axle loads acts uniformly over a length of one meter (approximately). This value is found by averaging the ones that would be obtained if the scheme of distribution suggested by Eurocode-1 was applied to the two extreme situations, i.e: the axle load acting directly over one of the sleepers and the axle lying in the middle point between two adjacent sleepers. A 25 cm-thick ballast layer has been considered for these computations.

Since the value of the impact coefficient is the same for all the bridges of the same length and damping, the same holds for the reduction of displacements R . Besides, considering Equation (4.b), the same property is found to be valid for the

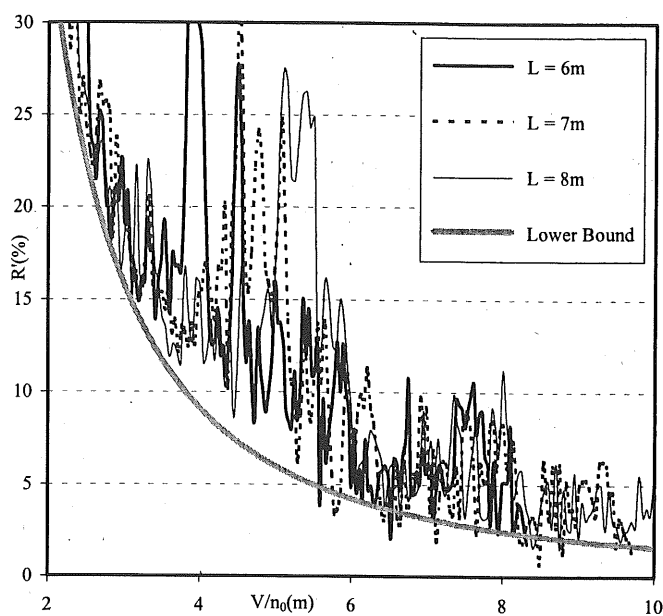


Figure 6: Reduction of the accelerations (R') as a function of the wavelength

reduction of the accelerations R' . Therefore the reductions defined in Equations 4 have been evaluated for nine *reference* bridges of spans ranging from 4 to 15 meters with a damping ratio $\zeta=0.01$. The results, as stated before, are valid for any bridge having a span length equal to the length of any of the reference bridges. Figures 4 and 5 show the maximum accelerations predicted by the concentrated and distributed loads models for the reference bridges of span length 5 and 10 meters. The results are plotted as a function of the wavelength $\lambda=V/n_0$. Five European high-speed trains have been considered in the analysis, including the Spanish TALGO, the French THALY'S, the German ICE-2, the Italian ETR-Y and the EUROSTAR.

As can be observed from Figures 4 and 5, while the reductions are negligible for the 10 meters bridges, they should not be disregarded in the 5 meters ones (especially for the low speeds). In general, it is found that the shorter the value of the wavelength, the greater the reduction of the accelerations. Conversely, for the longer wavelengths (i.e., for bridges with a lower fundamental frequency, or traversed by trains travelling at higher speeds) the reductions decrease monotonically.

This conclusion is shown in Figure 6, where the reduction R' is presented as a function of the wavelength for the bridges of 6, 7 and 8 meters of span length. The reduction R' appears as a very irregular function, characterised by sharp variations for small increments of λ . Nevertheless, a lower bound for the reduction can be proposed (as shown in Figure 6) which represents a safe choice for the engineer in charge of the dynamic analysis of any simply supported bridge.

However, if the reduction R' is evaluated only for the resonance wavelengths (i.e., those related to a resonance phenomenon, as $\lambda=4.4\text{m}$ or $\lambda=6.6\text{m}$ in Figure 4) it is found that the values do not correspond to any of the peaks above of below the lower bound in Figure 6. Indeed, the values are always somewhat greater than the lower bound in most cases.

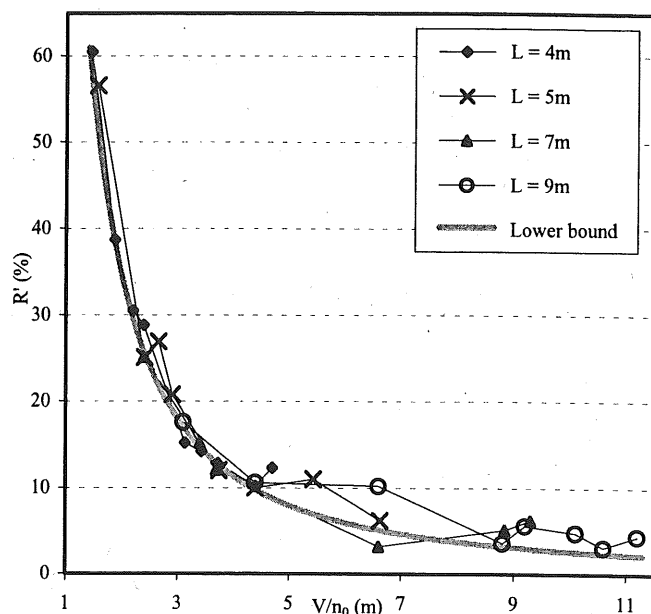


Figure 7: Reduction of the accelerations (R') computed for the resonance wavelengths.

This is shown in Figure 7, where the reduction R' has been evaluated for all the resonance wavelengths that can be found in the bridges of 4, 5, 7 and 9 meters of span length. Bridges of 6 and 8 meters are not included for the sake of clarity, and bridges longer than nine meters show negligible reductions for the usual range of speeds. As can be seen, a lower bound is also included that is slightly different from the one in Figure 6. The analytical expressions for both limits are

$$R' = 127,35 \cdot \lambda^{-1,9} \quad (5)$$

for the lower bound in Figure 6, and

$$R' = 104,43 \cdot \lambda^{-1,6} \quad (6)$$

for the one in Figure 7. Equation (6) is a good approximation

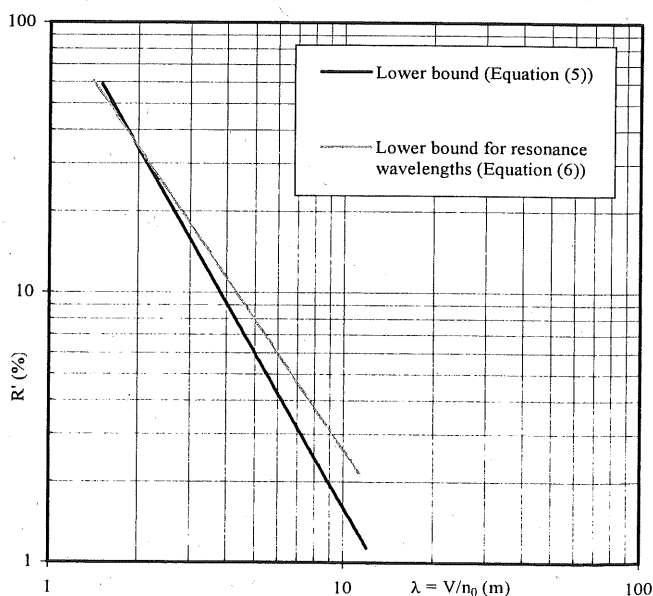


Figure 8: Lower bounds of the reduction of the accelerations

for the reduction of accelerations, especially for the values $\lambda < 4.5\text{m}$. There are some points in Figure 7 that lie below the lower bound, but this is of little importance since the differences are small (a more conservative expression for Equation (6) could also be adopted). Finally, in Figure 8 both lower bounds for R' (Equations (5) and (6)) are represented in logarithmic scale.

In this paper attention has been focussed on the accelerations since they are of major importance for short bridges, but similar developments can be done in a straightforward manner in order to obtain an approximation for the reduction of the impact coefficients.

4 Train-bridge interaction

4.1 Introduction

Train-bridge interaction is a phenomenon that takes place when the bridge oscillations or the road-surface roughness excite the motion of the vehicle sprung masses. As a result, the value of the axle forces becomes time-dependent and, therefore, it is no longer equal to the static axle load. In this paper the train-bridge interaction is investigated without considering the second of the aforementioned factors; this implies, as stated before, that solely the bridge vertical vibrations cause the motion of the sprung masses.

The D-214 committee of the European Rail Research Institute (ERRI) showed that train-bridge interaction has a considerable influence in the dynamic behaviour of bridges having span lengths shorter than 15÷20 meters [6]. This fact was also confirmed by the authors in previous works [12], where reductions of the displacements and accelerations about 25% were found when comparing the moving loads and the interaction models. Moreover, it can be shown that the maximum reductions of the bridge response take place at the resonance speeds (or wavelengths), thus making the moving loads model excessively conservative for the design of short, simply supported bridges. In Figure 9 the impact coefficients at the resonance wavelength $\lambda=8.8\text{m}$ for three

bridges of $L=10\text{m}$ can be seen. All the calculations in section 4 have been performed considering the ICE-2 as the only excitation.

In principle, evaluating the reduction of the response due to the train-bridge interaction is not a simple matter. As shown in figure 9, the main difficulty stems from the fact that, unlike the reduction due to the load distribution through sleepers and ballast, the train-bridge interaction effects are not the same for all bridges of the same length. Therefore, a complete dynamic analysis in the time domain is required that most of the commercial Finite Element codes are not able to perform.

Considering that the length and damping ratio of the bridge will be kept to a constant value (10 meters and 1%, respectively), the reductions of the displacements and accelerations can be defined as follows:

$$R(\lambda, n_0, I) = \frac{\Phi_c(\lambda) - \Phi_i(\lambda, n_0, I)}{\Phi_c(\lambda)} \cdot 100 \quad (7.a)$$

$$R'(\lambda, n_0, I) = \frac{a_c(\lambda, n_0, I) - a_i(\lambda, n_0, I)}{a_c(\lambda, n_0, I)} \cdot 100 \quad (7.b)$$

In Equations (7) Φ_c and a_c are the impact coefficient and maximum acceleration computed with the moving loads model, while, Φ_i and a_i are the ones computed taking into account the train-bridge interaction; λ and n_0 are the usual wavelength and the natural frequency of the bridge, and I is the moment of inertia of the cross-section of the beam.

From Equations (7) it can be seen that the reductions R and R' depend, for a given wavelength, on the fundamental frequency of the bridge as well as on the bridge static stiffness (i.e., on the moment of inertia I , provided the material is given). In reference [12] it was shown by the authors that this was true for the reduction of the impact coefficients. In order to investigate the dependence of R and R' on such variables, a parametric study has been conducted in which the behaviour of several bridges of 10 meters of span length has been studied. Five different values of the fundamental frequency, ranging from the lower to the upper limits recommended by Eurocode-1, have been selected: $n_{01}=8\text{Hz}$ (lower limit), $n_{02}=10.23\text{Hz}$, $n_{03}=12.46\text{Hz}$, $n_{04}=14.7\text{Hz}$ and $n_{05}=16.93\text{Hz}$ (upper limit). As can be seen, the five values of frequency are equally spaced.

Then, for every value n_{0i} , five bridges with different moments of inertia have been selected. The values of the moments of inertia have been chosen so as to be realistic, and this has been accomplished by satisfying two requirements. First, the static deflection δ of the bridge due to its own weight and the Load Model 71 [4] acting simultaneously must lie between the following values: $500 \leq L/\delta \leq 3000$. These limits are slightly broader than the usual ones in the design of railway bridges. A classification factor $\alpha=1.21$ has been applied to the Load Model 71, as imposed by the Spanish Code of Actions. Second, the mass of the bridge per unit length must be greater than 3000 kg/m, a value which is found in some light metal bridges, and smaller than 20000 kg/m, which is

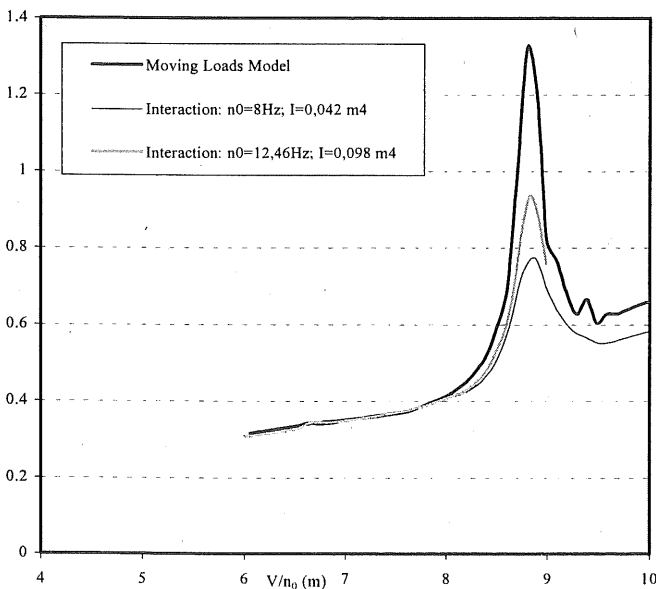


Figure 9: Impact coefficients for three bridges of span $L=10\text{m}$.

$n_{01} = 8 \text{ Hz}$		$n_{02} = 10,23 \text{ Hz}$		$n_{03} = 12,46 \text{ Hz}$		$n_{04} = 14,7 \text{ Hz}$		$n_{05} = 16,93 \text{ Hz}$	
B11	$L/\delta = 500$	B21	$L/\delta = 500$	B31	$L/\delta = 700$	B41	$L/\delta = 1000$	B51	$L/\delta = 1300$
	$m = 5836$		$m = 3165$		$m = 2957$		$m = 3052$		$m = 2980$
	$I = 0,042045$		$I = 0,037308$		$I = 0,051713$		$I = 0,074215$		$I = 0,096147$
B12	$L/\delta = 637,5$	B22	$L/\delta = 812,5$	B32	$L/\delta = 1175$	B42	$L/\delta = 1500$	B52	$L/\delta = 1725$
	$m = 8175$		$m = 5784$		$m = 5591$		$m = 5006$		$m = 4182$
	$I = 0,058899$		$I = 0,068175$		$I = 0,097787$		$I = 0,121720$		$I = 0,134938$
B13	$L/\delta = 775$	B23	$L/\delta = 1125$	B33	$L/\delta = 1650$	B43	$L/\delta = 2000$	B53	$L/\delta = 2150$
	$m = 11026$		$m = 9148$		$m = 8988$		$m = 7362$		$m = 5532$
	$I = 0,079443$		$I = 0,107824$		$I = 0,157207$		$I = 0,179014$		$I = 0,178479$
B14	$L/\delta = 912,5$	B24	$L/\delta = 1437,5$	B34	$L/\delta = 2125$	B44	$L/\delta = 2500$	B54	$L/\delta = 2575$
	$m = 14579$		$m = 13627$		$m = 13536$		$m = 10260$		$m = 7058$
	$I = 0,105041$		$I = 0,160623$		$I = 0,236756$		$I = 0,249470$		$I = 0,227698$
B15	$L/\delta = 1050$	B25	$L/\delta = 1750$	B35	$L/\delta = 2600$	B45	$L/\delta = 3000$	B55	$L/\delta = 3000$
	$m = 19128$		$m = 19888$		$m = 19939$		$m = 13909$		$m = 8796$
	$I = 0,137816$		$I = 0,234414$		$I = 0,348748$		$I = 0,338211$		$I = 0,283784$

Table 1. Natural frequencies and mechanical properties of the 25 bridges analysed in the parametric study. Masses per unit length are given in kilograms per meter. Moments of inertia are given in m^4 .

considered an upper limit for simply supported bridges of length $L=10\text{m}$.

This makes a total amount of 25 bridges analysed, each of them for 85 values of speed ranging from 100 to 400 km/h (i.e., from 28 to 112 m/s, with a step of 1 m/s). The mechanical properties of the bridges are shown in Table 1. Bridges are referenced by means of an abbreviation B_{ij} , where subscript i indicates the value of the natural frequency and subscript j indicates the value of the moment of inertia (or mass, since both are related to the frequency, as it is well known). Following this notation, bridge B21 has a natural frequency n_{02} and the lowest value of inertia of the second column of the table, and bridge B45 has natural frequency n_{04} and the highest value of inertia of the fourth column of the table.

4.2 Approximation of the impact coefficient and maximum acceleration

Figure 10 shows the reduction R of the impact coefficients for bridges B11, B12 and B15 as a function of the wavelength. In this figure it can be observed that the reductions are nearly proportional to each other. Similarly, in Figure 11 the reduction R' of the maximum acceleration for bridges B31, B33 and B35 is presented. Again, it seems that any of the curves in this figure can be obtained from any other multiplying by an appropriate factor. Thus, taking bridge B11 as the *reference bridge*, an approximation for the reductions is given by

$$R(\lambda, n_0, I) \cong \gamma(n_0, I) \cdot R_{ref}(\lambda) \quad (8.a)$$

$$R'(\lambda, n_0, I) \cong \gamma'(n_0, I) \cdot R'_{ref}(\lambda) \quad (8.b)$$

where $R_{ref}(\lambda)$ and $R'_{ref}(\lambda)$ are the reductions for bridge B11 and $\gamma(n_0, I)$, $\gamma'(n_0, I)$ are the *intensities of reduction* for a bridge with natural frequency n_0 and moment of inertia I .

$R_{ref}(\lambda)$ and $R'_{ref}(\lambda)$ are shown in Figures 12 and 13 as a function of the wavelength. The values of the intensities of reduction are shown in Table 2 for the 25 bridges.

Substituting the values given by Equations (8) in Equations (7) an approximation to the impact coefficient Φ_i can be obtained as follows:

$$\Phi_{i,app}(\lambda, n_0, I) = \Phi_c(\lambda) \left[1 - \gamma(n_0, I) \frac{R_{ref}(\lambda)}{100} \right] \quad (9)$$

Proceeding in an analogous way, an approximated value of the acceleration can be found, but in this case the first factor depends on the frequency and inertia of the bridge:

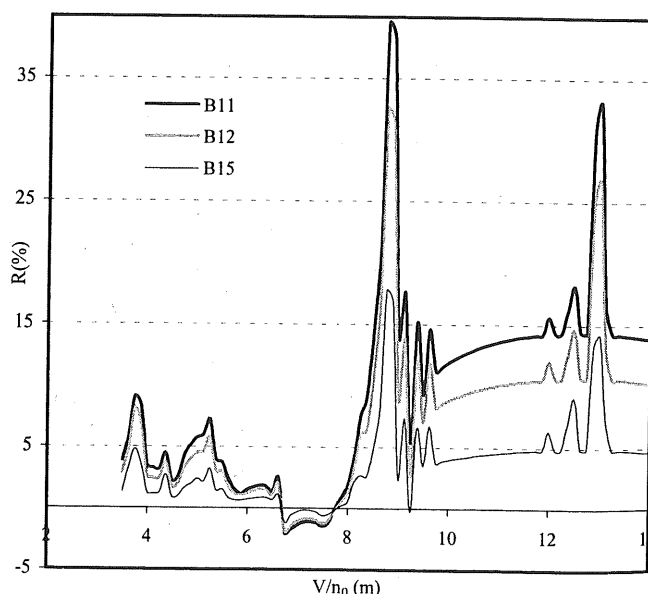


Figure 10: Reduction of the impact coefficients for bridges B11, B12 and B15

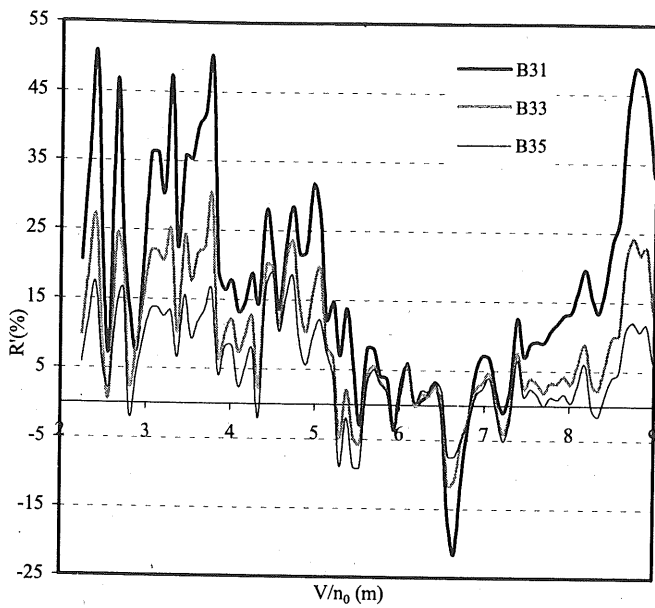


Figure 11: Reduction of the maximum accelerations for bridges B31, B33 and B35

$$a_{i,app}(\lambda, n_0, I) = a_c(\lambda, n_0, I) \left[1 - \gamma'(n_0, I) \frac{R'_{ref}(\lambda)}{100} \right] \quad (10)$$

Nevertheless, Equation (10) can be modified taking into account the similarity formula (2.b) to give

$$a_{i,app}(\lambda, n_0, I) = a_{c,ref}(\lambda) \frac{m_{ref}}{m} \left[1 - \gamma'(n_0, I) \frac{R'_{ref}(\lambda)}{100} \right] \quad (11)$$

where m_{ref} is the mass per unit length of bridge B11, m is the mass per unit length of the bridge with frequency n_0 and moment of inertia I ; $a_{c,ref}(\lambda)$ is the maximum acceleration of bridge B11 obtained from the moving loads model.

In Equations (9) and (11), approximations for the impact coefficient and maximum acceleration are given in such a

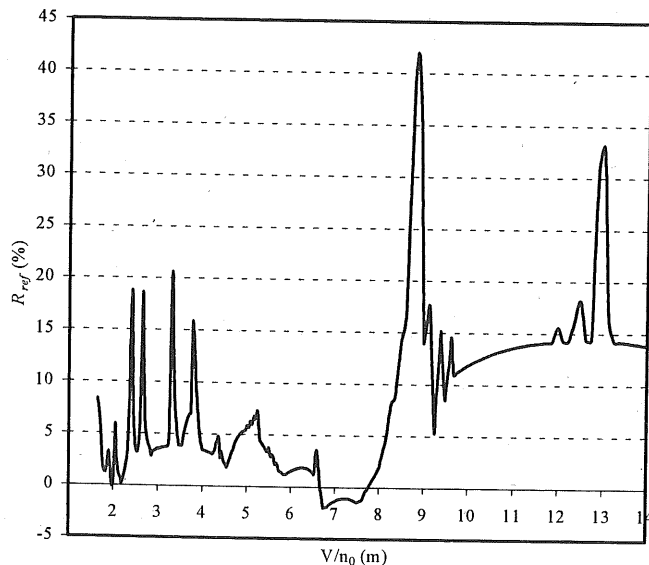


Figure 12: Reduction of the impact coefficient for bridge B11 (R_{ref})

way that the dependence on the wavelength is concentrated on $\Phi_c(\lambda)$, $a_{c,ref}(\lambda)$, $R_{ref}(\lambda)$ and $R'_{ref}(\lambda)$. The values of these factors are the same for all bridges of length $L=10$ meters and damping ratio $\zeta=1\%$.

Equations (9) and (11) take into account the train-bridge interaction and are easy to apply: $\Phi_c(\lambda)$ and $a_{c,ref}(\lambda)$ can be computed using the moving loads model; $R_{ref}(\lambda)$ and $R'_{ref}(\lambda)$ are shown in Figures 12 and 13; finally, the intensities of reduction can be obtained from Table 2. The values of $\gamma(n_0, I)$ and $\gamma'(n_0, I)$ corresponding to bridges different from the ones analysed in this study can be computed by linear interpolation.

4.3 Approximate formulas for the intensities of reduction

A final improvement is presented in this section that simplifies the computation of the impact coefficient and maximum acceleration for any bridge of 10 meters of span length and damping ratio $\zeta=1\%$.

If the values of the intensities of reduction shown in Table 2 are represented as a function of the moment of inertia using logarithmic scales, Figures 14 and 15 are obtained. As can be seen, the values of γ and γ' lie on nearly straight lines, each of them corresponding to a different value of the fundamental frequency.

This suggests that the intensities can be approximated by expressions such as

$$\gamma(n_0, I) = K(n_0) \cdot I^N \quad (12.a)$$

$$\gamma'(n_0, I) = K'(n_0) \cdot I^{N'} \quad (12.b)$$

The exponents $N = -0,93$ and $N' = -0,74$ produce the best fitting for the straight lines in Figures 14 and 15. In addition, if the values of the coefficients $K(n_0)$ and $K'(n_0)$ are investigated, they are found to be almost linearly dependent

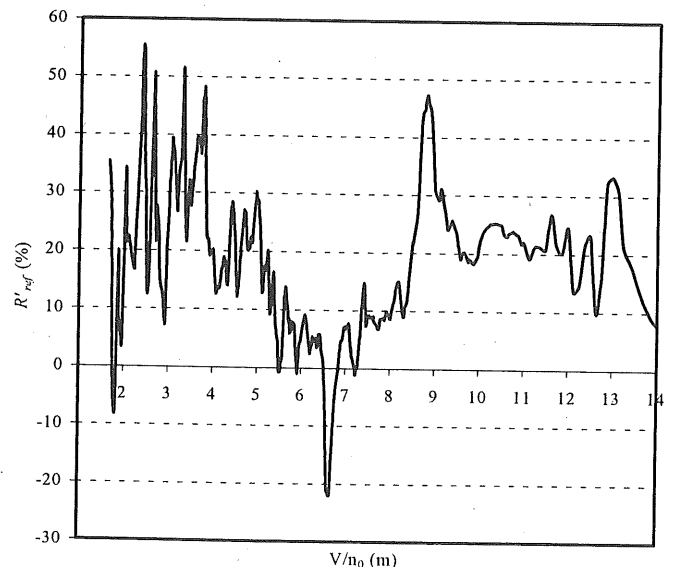


Figure 13: Reduction of the maximum accelerations for bridge B11 (R'_{ref})

$n_{01} = 8 \text{ Hz}$		$n_{02} = 10,23 \text{ Hz}$		$n_{03} = 12,46 \text{ Hz}$		$n_{04} = 14,7 \text{ Hz}$		$n_{05} = 16,93 \text{ Hz}$	
B11	$\gamma = 1,0$	B21	$\gamma = 1,33$	B31	$\gamma = 1,17$	B41	$\gamma = 0,97$	B51	$\gamma = 0,87$
	$\gamma' = 1,0$		$\gamma' = 1,20$		$\gamma' = 1,03$		$\gamma' = 0,86$		$\gamma' = 0,74$
B12	$\gamma = 0,74$	B22	$\gamma = 0,80$	B32	$\gamma = 0,67$	B42	$\gamma = 0,63$	B52	$\gamma = 0,63$
	$\gamma' = 0,80$		$\gamma' = 0,80$		$\gamma' = 0,67$		$\gamma' = 0,6$		$\gamma' = 0,58$
B13	$\gamma = 0,57$	B23	$\gamma = 0,53$	B33	$\gamma = 0,44$	B43	$\gamma = 0,44$	B53	$\gamma = 0,49$
	$\gamma' = 0,65$		$\gamma' = 0,57$		$\gamma' = 0,47$		$\gamma' = 0,45$		$\gamma' = 0,47$
B14	$\gamma = 0,44$	B24	$\gamma = 0,37$	B34	$\gamma = 0,31$	B44	$\gamma = 0,33$	B54	$\gamma = 0,39$
	$\gamma' = 0,52$		$\gamma' = 0,42$		$\gamma' = 0,34$		$\gamma' = 0,35$		$\gamma' = 0,39$
B15	$\gamma = 0,34$	B25	$\gamma = 0,26$	B35	$\gamma = 0,21$	B45	$\gamma = 0,25$	B55	$\gamma = 0,33$
	$\gamma' = 0,43$		$\gamma' = 0,31$		$\gamma' = 0,25$		$\gamma' = 0,27$		$\gamma' = 0,34$

Table 2. Intensities of reduction for the impact coefficients and maximum accelerations.

on the value of the frequency. Straightforward calculations allow expressing them as

$$K(n_0) = 0,0143 + 0,00498 \cdot n_0$$

(13.a)

$$K'(n_0) = 0,0715 + 0,00353 \cdot n_0$$

(13.b)

If this values are substituted into Equations (12), two approximate expressions for the intensities of reduction are obtained:

$$\gamma(n_0, I) = (0,0143 + 0,00498 \cdot n_0) \cdot I^{-0,93}$$

(14.a)

$$\gamma'(n_0, I) = (0,0715 + 0,00353 \cdot n_0) \cdot I^{-0,74}$$

(14.b)

where the natural frequency is to be expressed in Hz, and the moment of inertia in m⁴.

Using Equations (14) in Equations (9) and (11) produces

approximate values of the impact coefficients and maximum accelerations that are in very good agreement with those obtained from the train-bridge interaction model. The comparison is highly satisfactory for all the 25 bridges analysed in the parametric study: in only four of them the peak values are underestimated by less than 10%, while in the rest the approximated values are slightly greater than the exact ones, or in many cases they are almost identical.

Figures 16 to 21 show the comparison between the approximated values and the ones obtained from the interaction model. The impact coefficients and maximum accelerations computed with the moving loads model are also included in order to give an idea of the degree of precision of the approximation proposed in this section.

5 Conclusions

(1) In section 3 the effects of the loads distribution through the sleepers and ballast layer have been analysed. It has been

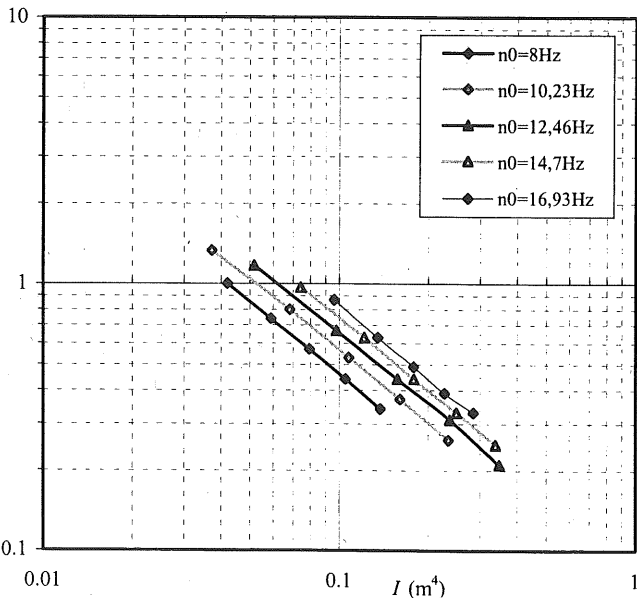


Figure 14: Intensities of reduction for the impact coefficients (γ)

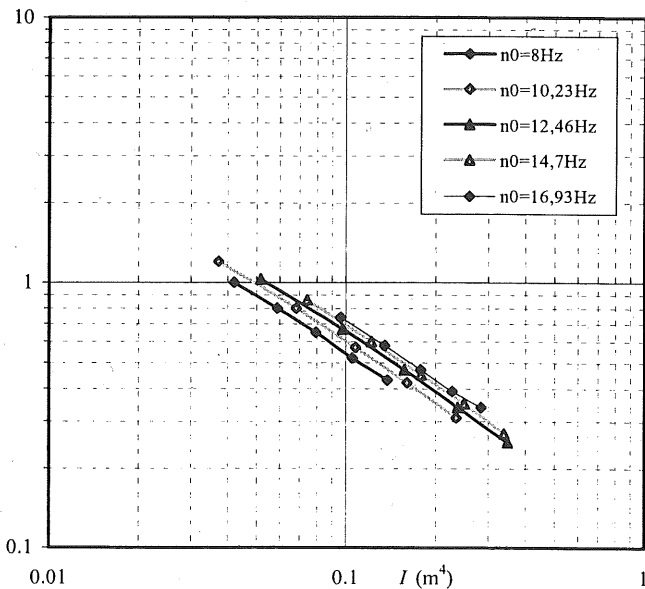


Figure 15: Intensities of reduction for the Maximum accelerations (γ')

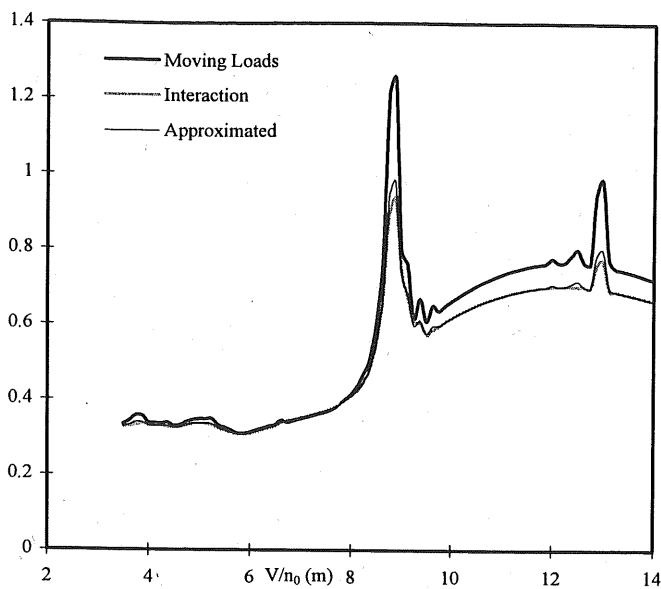


Figure 16: Impact coefficients for bridge B13

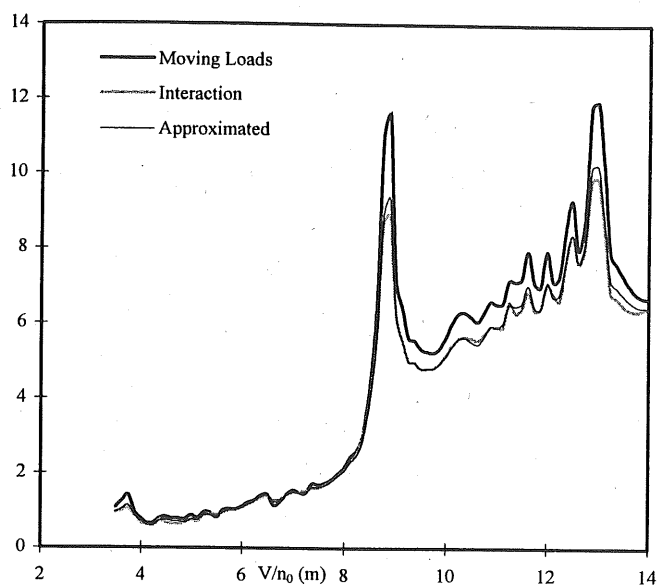


Figure 17: Maximum accelerations (m/s^2) for bridge B15

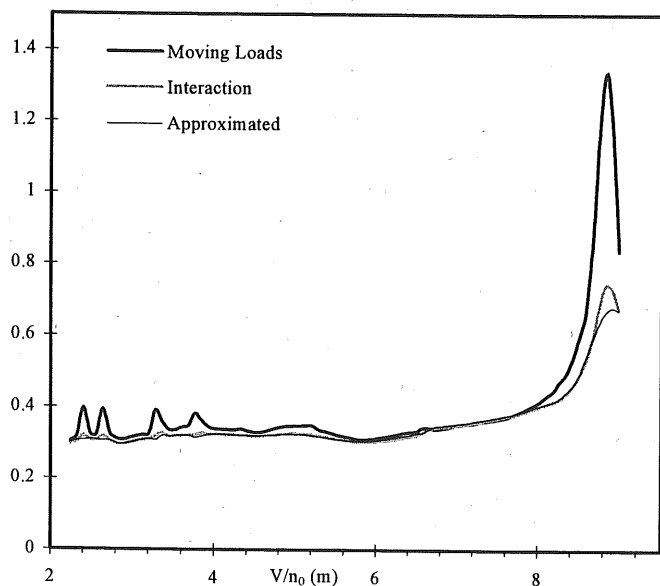


Figure 18: Impact coefficients for bridge B31

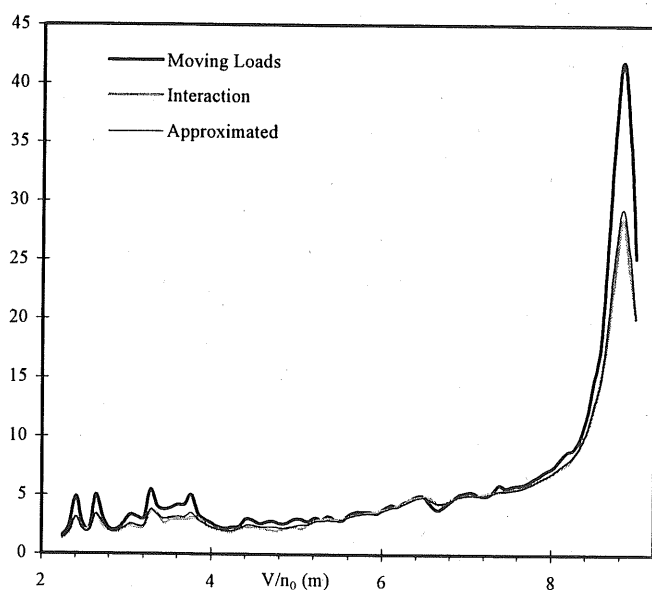


Figure 19: Maximum accelerations (m/s^2) for bridge B32

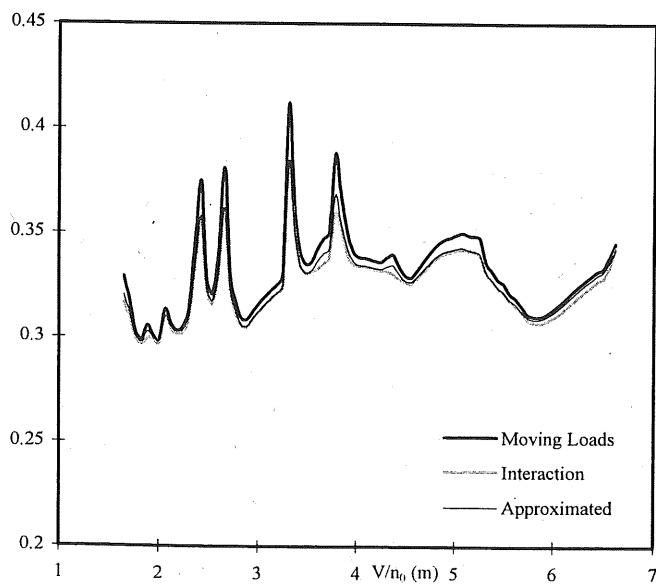


Figure 20: Impact coefficients for bridge B55

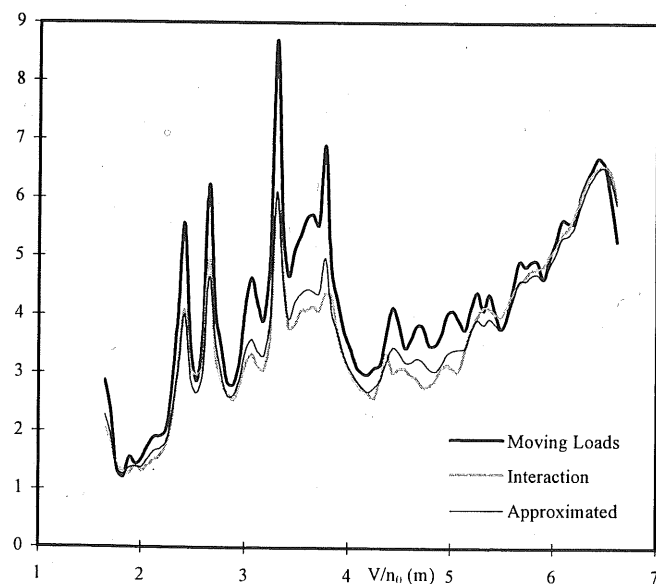


Figure 21: Maximum accelerations (m/s^2) for bridge B52

shown that the maximum accelerations of the deck are not significantly affected by this factor except for the shorter values of the wavelength. For simply supported bridges with $\lambda = V/n_0 \leq 4+5$ m, reductions of the accelerations of 10% or higher can be expected. The calculations have been performed considering that each axle load is distributed uniformly over a length of one meter.

(2) The train-bridge interaction causes reductions of considerable importance in the maximum displacements and accelerations of short bridges. The effects of the ICE-2 train on 25 simply supported bridges of 10 meters of span length have been investigated, and it has been found that the reductions obtained in bridges with different natural frequency and moment of inertia are nearly proportional to each other. The coefficients of proportionality, called *intensities of reduction*, have been computed for displacements and accelerations taking bridge B11 (see Table 1) as the reference one. The results are presented in Table 2.

(3) The intensities of reduction can be very accurately approximated using Equations (14). The comparison of the impact coefficients and maximum accelerations obtained from the interaction model with those obtained from Equations (9) and (11) is highly satisfactory. The results are shown in Figures 16 to 21.

References

- [1] Biggs, J.M., "Introduction to structural dynamics", Mc Graw-Hill, New York, 1964.
- [2] Bleich, "Theorie und berechnung der eisernen brücken", Springer-Verlag, 1924.
- [3] Bresse, "Cours de mecanique", Ecole de Ponts et Chaussées, Paris, 1880.
- [4] Comité Européen de Normalisation (CEN). "Eurocode 1 - Basis of design and actions on structures", CEN, 1995.
- [5] European Rail Research Institute (ERRI), "Ponts rails pour vitesses > 200 km/h et < 350km/h. Conditions de déformation dynamiques. Rapport interimaire", ERRI, 1997.
- [6] European Rail Research Institute (ERRI), "Ponts rails pour vitesses > 200km/h. Interaction train-pont. Rapport d'information", ERRI, 1997.
- [7] Frýba, L., "Vibration of solids and structures under moving loads", Noordhoff, Groningen, 1972.
- [8] Frýba, L., "Dynamics of railway bridges", Thomas Telford, London, 1996.
- [9] Inglis, C.E., "A mathematical treatise on vibrations in railway bridges", Cambridge Univ. Press, Cambridge, 1934.
- [10] Mancel, F., "Cedypia: Analytical software for calculating dynamic effects on railway bridges", in "Proceedings of the 4th Conference of the European Association for Structural Dynamics", A.A. Balkema, The Netherlands, 1999.
- [11] Ministerio de Obras Públicas y Urbanismo (MOPU), "Instrucción relativa a las acciones a considerar en el proyecto de puentes de ferrocarril", MOPU, 2000 (in preparation).
- [12] Museros, P., Vivero, G. Alarcón, E., "Moving loads in railway bridges: The Spanish Code Approach", in "Proceedings of the 4th Conference of the European Association for Structural Dynamics", A.A. Balkema, The Netherlands, 1999.
- [13] Nasarre, J., "Algunas consideraciones sobre la necesidad de cálculos dinámicos de los puentes ferroviarios para velocidades elevadas", in "Proceedings, 1; 1st Congress of the Technical and Scientific Society for the Structural Concrete", Seville, Spain, 1999.
- [14] Olsson, M., "On the fundamental moving load problem", Journal of Sound and Vibration, 145(2), 299-307, 1991.
- [15] Stokes, G.G., "Mathematical and physical papers", Cambridge, 1847.
- [16] Swanson Analysis System Inc., "Ansys V5.0: Theory Manual", Swanson Analysis System Inc, Houston, 1992.
- [17] Timoshenko, S.P., Young, D.H., "Vibration problems in engineering", D. Van Nostrand, New York, 1955, 3rd ed.
- [18] Willis, R., "Appendix to the report of the commissions appointed to inquire into the application of iron to railway structures", H. M. Stationery office, London, 1849.
- [19] Yang, Y.B., Yau, J.D., "Vehicle-bridge interaction element for dynamic analysis", Journal of Structural Engineering (ASCE), 1512-1518, 1997.